


		15 AMP		20 AMP		30 AMP		50 AMP		60 AMP	
		RECEPTACLE	PLUG	RECEPTACLE	PLUG	RECEPTACLE	PLUG	RECEPTACLE	PLUG	RECEPTACLE	PLUG
2-POLE 2-WIRE	1 125-V										
	2 250-V										
4-POLE 3-WIRE GROUNDING	5 125-V										
	6 250-V										
	7 277-V AC										
	24 347-V AC										
3-POLE 3-WIRE	10 125/ 250-V AC										
	11 3 Ø 250-V										
4-POLE 4-WIRE GROUNDING	14 125/ 250-V										
	15 3 Ø 250-V										
4-POLE 4-WIRE	18 3ØY 120/250-V										

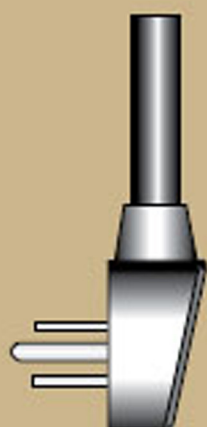

CABLE LENGTH	AMPERES OF LOAD							
	4	5-6	7	8-10	11-16	16-20	25	
25	18	18	18	18	16	14	10	<ul style="list-style-type: none"> <li>• 1/2 H.P. = 7.4 amps</li> <li>• 3/4 H.P. = 10.3 amps</li> <li>• 1 H.P. = 13 amps</li> <li>• 2 H.P. = 7 amps</li> <li>• 800 watts = 7 amps</li> <li>• 1100 watts = 10 amps</li> <li>• 1650 watts = 15 amps</li> </ul>
50	18	18	18	18	16	12	10	
100	18	18	18	16	14	12	10	
150	18	16	16	14	12	12	10	
200	16	14	14	12	10	10	8	